

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2000-039040

(43)Date of publication of application : 08.02.2000

(51)Int.Cl.

F16D 49/14

(21)Application number : 10-207805

(71)Applicant : NSK WARNER KK

(22)Date of filing : 23.07.1998


(72)Inventor : OMUTSUNO SATOSHI

## (54) TUBE PRESSURE TYPE BRAKE

(57)Abstract:

**PROBLEM TO BE SOLVED:** To provide a tube pressure type brake to prevent a tube from contact with an inside member even when the tube slacks during racing even when the tube is made of a material having no elasticity.

**SOLUTION:** Figure 10 is taken as a tube pressure type brake bank, 20 as an outer frame, 21 as a window part formed in a part of the outer frame, 22 as a space to contain an inside member, not shown, such as a brake drum, 30 as a tube, 31 as a tube folded part at the edge of the window part, 40 as a press plate, 41 as a rivet, and 32 as a hole through which pressure fluid is fed to the tube. A spring 33 is interposed in the tube 30 and the tube 30 is energized axially or axially externally of the tube 30. Thereby, a slack of the tube is prevented from occurring.

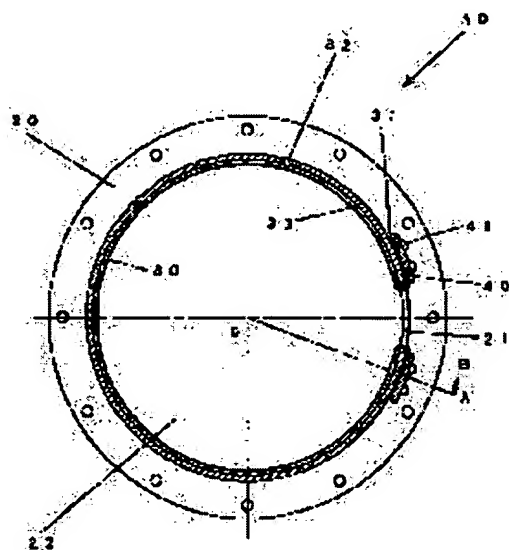

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's

BEST AVAILABLE COPY

decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

BEST AVAILABLE COPY